


Model: GPP150D5 | GPP150S5

Powered by PERKINS

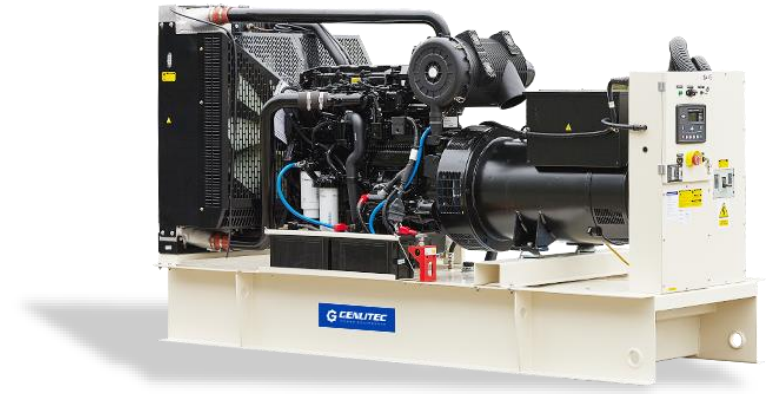

Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	150	165
Power (KW)	120	132
Rated speed	1500RPM	
Standard voltage	380/220V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPP150D5 GPP150S5	
Engine brand	PERKINS	
Engine model	1106A-70TAG2	
Speed control type	Electronic	
Alternator brand	LEROY SOMER	
Alternator model	TAL-A44-J	
Control system	SMARTGEN HGM6110N	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption	100% Prime Load	33.4 L/hrs
	75% Prime Load	24.7 L/hrs
	50% Prime Load	16.7 L/hrs
Fuel tank volume	230 Liters	



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010

• GPP150D5: OPEN TYPE; GPP150S5: SILENT TYPE

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	PRP		ESP		Current Amps
	KVA	KW	KVA	KW	
415/240	150	120	165	132	209
400/230	150	120	165	132	217
380/220	150	120	165	132	228

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

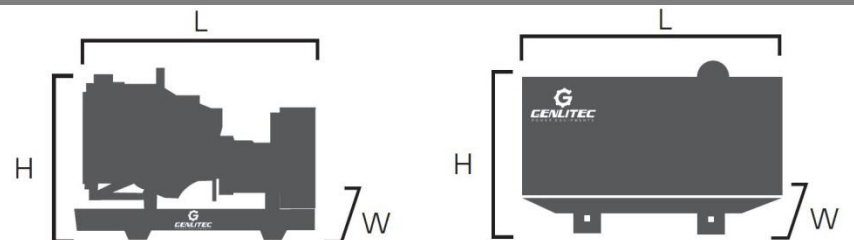

Dimension	Open type	Silent type
Length (L)	2350mm	3100mm
Width (W)	1000mm	1200mm
Height (H)	1450mm	1800mm
Net Weight	1150kg	1850kg

Note: This parameters allows for some acceptable deviations.

■ **Engine Specification**



MODEL: PERKINS 1106A-70TAG2

Cylinder number	6
Aspiration system	Turbo, Air/air cooling
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	105 x 135
Compression ratio	16.1:1
Rated speed (RPM)	1500
Displacement (L)	7.01
Rated power (KW)	144.1
Standby power (KW)	153.6
Oil consumption (g/kw.h)	/
Fuel system	Direct injection
Oil capacity (L)	16.5
Coolant capacity (L)	21
Starter motor capacity	DC 24V – 40A

■ **Alternator Specification**



MODEL: LEROY SOMER TAL-A44-J

Number of phase	3
Rated power (KW/KVA)	120/150
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ **Optional Supply Scope**

Engine	Alternator	Generator Sets	Control Panel
<input type="checkbox"/> Water jacket pre-heater	<input type="checkbox"/> Anti-condensation heater	<input type="checkbox"/> Extended fuel tank 24h/36h/72h	<input type="checkbox"/> Remote control system
<input type="checkbox"/> Lubrication oil pre-heater	<input type="checkbox"/> PMG	<input type="checkbox"/> Soundproof canopy	<input type="checkbox"/> Build-in/External ATS
<input type="checkbox"/> Battery isolator	<input type="checkbox"/> STAMFORD alternator	<input type="checkbox"/> Trailer mounted	<input type="checkbox"/> Synchronizing System
<input type="checkbox"/> Electric governor	<input type="checkbox"/> LEROY SOMER alternator		<input type="checkbox"/> Power output sockets

■ **Warranty Period**

Perkins Engine: Global warranty, 12 months or 1000 hours, whichever comes first.

Genlitec Alternator: Genlitec company limited warranty, 15 months or 1200 hours, whichever comes first.

Genlitec Genset: Genlitec company limited warranty, 15 months or 1200 hours, whichever comes first.

Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
 - Over / under voltage
 - Over / under frequency
 - Current / voltage asymmetry
 - Over current / overload
- Three phase AMF function
 - Over / under voltage
 - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



Control Module Model: SMARTGEN HGM6110N

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options

COMAP

AMF25



DEESEA

DSE6020



DEESEA

DSE7320

