

Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	18	20
Power (KW)	14.5	16
Rated speed	1500RPM	
Standard voltage	400/230V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GYM18S5 GYM18D5	
Engine brand	YANMAR	
Engine model	4TNV88-BIGE	
Speed control type	Mechanical	
Alternator brand	GENLITEC	
Alternator model	S164G15	
Control system	SMARTGEN HGM6120N	
Emission	EU Stage V	
Frequency	50Hz	
Fuel Consumption (L/H)	100% Prime Load	5.5
	75% Prime Load	4.2
	50% Prime Load	-
	25% Prime Load	-
Fuel Tank (L)	32	



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery directive
- 2014/30/EU Electromagnetic compatibility directive
- EN 12100:2010; EN ISO 8528-13:2016; EN 60204-1:2018; EN 61000-6-2:2019; EN 61000-6-4:2019
- **GYM18S5 (Silent Type)**
- **GYM18D5 (Open Type)**

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set can deliver for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	20	16	18	14.5	25
400/230	20	16	18	14.5	26
380/220	20	16	18	14.5	27.3

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

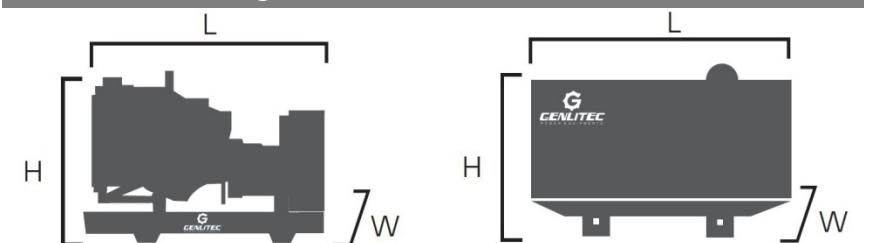

Dimension	Open type	Silent type
Length (L)	1650mm	2000mm
Width (W)	720mm	850mm
Height (H)	1150mm	1150mm
Net Weight	650kg	750kg

Note: This parameter allows for some acceptable deviations.

■ Engine Specification



MODEL: YANMAR 4TNV88-BIGE (EU Stage V)

Cylinder number	4
Aspiration system	Natural
Cooling method	Water cooled
Combustion system	Direct injection
Bore x Stroke (mm)	88 x 90
Compression ratio	20:1
Rated speed (RPM)	1500
Displacement (L)	2.190
Rated power (KW)	17.2
Standby power (KW)	18.5
Fuel injection pump	YPD-MP2
Firing order	1-3-4-2-1
Oil capacity (L)	7.4 (Max.)
Coolant capacity (L)	2.7
Starter motor capacity	DC 12V – 1.4KW

■ Alternator Specification



MODEL: GENLITEC S164G15

Number of phase	3
Rated power (KW/KVA)	15/18.75
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	6/12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
<input type="checkbox"/> Water jacket pre-heater	<input type="checkbox"/> Anti-condensation heater	<input type="checkbox"/> Extended fuel tank 12h/24h/72h	<input type="checkbox"/> Remote control system
<input type="checkbox"/> Lubrication oil pre-heater	<input type="checkbox"/> PMG	<input type="checkbox"/> C-Type Soundproof canopy	<input type="checkbox"/> Build-in/External ATS
<input type="checkbox"/> Battery isolator	<input type="checkbox"/> STAMFORD alternator	<input type="checkbox"/> D-Type Soundproof canopy	<input type="checkbox"/> Synchronizing System
	<input type="checkbox"/> LEROY SOMER alternator	<input type="checkbox"/> Trailer mounted	<input type="checkbox"/> Power output sockets

■ Warranty Period

YANMAR diesel engine: Global warranty, 12 months or 1000 working hours.

STAMFORD/LEROY SOMER alternator: Global warranty, 12 months or 1000 working hours.

GENLITEC alternator: Factory warranty, 12 months or 1000 working hours.

DEEPSEA control module: Factory warranty, 12 months or 1000 working hours.

Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
 - Over / under voltage
 - Over / under frequency
 - Current / voltage asymmetry
 - Over current / overload
- Three phase AMF function
 - Over / under voltage
 - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



Control Module Model: SMARTGEN HGM6120N

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options

COMAP	DEIF	DEESEA
AMF25	SGC 420	DSE7320



GENLITEC POWER TECHNOLOGY CO., LTD.
GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD.
 marketing@genlitech.com | www.genlitechpower.com

Local Distributor / Partner



All information in the document is substantially correct at the time of printing
 But may be subsequently altered by the company.