

Power anywhere anytime

Model: GPP200D5 | GPP200S5

Powered by PERKINS





Generator Specification

Service	PRP (1)	ESP(2)
Power (KVA)	200	220
Power (KW)	160	176
Rated speed	1500	RPM
Standard voltage	400/	230V
Power factor	0	.8
Phase		3



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010
- GPP200D5: OPEN TYPE; GPP200S5: SILENT TYPE

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage	ES	P	PR	P	Current
(V)	KVA	KW	KVA	KW	Amps
415/240	220	176	200	160	278.2
400/230	220	176	200	160	288.7
380/220	220	176	200	160	303.9

Performance Data		
Model		GPP200D5 GPP200S5
Engine brand		PERKINS
Engine model		1106A-70TAG4
Speed control type		Electronic
Alternator brand		LEORY SOMER
Alternator model		TAL-A46-B
Control system		SMARTGEN HGM6120N
Starter motor voltage		24V
Frequency		50Hz
	100% Prime Load	45.8
Fuel	75% Prime Load	34.7
Consumption	50% Prime Load	23.1
(L/H)	25% Prime Load	12.6
	Fuel Tank (L)	300

Standard Reference Conditions

Note: Standard reference condition 25° C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

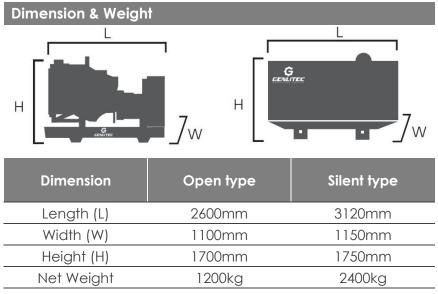

Note: This parameters allows for some acceptable deviations.



Power anywhere anytime

Engine Specification

Alternator Specification



MODEL: PERKINS 1106A-70TAG4

Cylinder number	6
Aspiration system	Turbocharged
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	105 x 135
Compression ratio	16.1:1
Rated speed (RPM)	1500
Displacement (L)	7.01
Rated power (KW)	178.9
Standby power (KW)	196.3
Oil consumption (g/kw.h)	≤4
Coolant capacity (L)	21
Oil capacity (L)	16.5
Fuel system	Rotary type pump
Starter motor capacity	DC 24V



MODEL: LEORY SOMER TAL-A46-	В
Number of phase	3
Rated power (KW/KVA)	160/200
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator

Optional Supply Scope

• A.V.R

- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker
- Engine Alternator **Generator Sets Control Panel** Water jacket pre-heater Ο Anti-condensation heater Ο Extended fuel tank 12h/24h/72h Ο Remote control system Ο O PMG Lubrication oil pre-heater Soundproof canopy Build-in/External ATS Ο Ο 0 Battery isolator Trailer mounted Synchronizing System Ο Ο Ο Ο 20GP containerized canopy 0 Power output sockets

Warranty Period

PERKINS diesel engine: Global warranty, 12 months or 1000 working hours.
LEORY SOMER alternator: Global warranty, 12 months or 1000 working hours.
GENLITEC alternator: Factory warranty, 12 months or 1000 working hours.
SMARTGEN control module: Factory warranty, 12 months or 1000 working hours.



Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
- Over / under voltage
- Over / under frequency
- Current / voltage asymmetry
- Over current / overload
- Three phase AMF function
- Over / under voltage
- Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket

Control Module Model: SMARTGEN HGM6120N

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options



GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD. marketing@genlitec.com | www.genlitec.com



All information in the document is substantially correct at the time of printing But may be subsequently altered by the company.

Power anywhere anytime