

## ■ Model: **GPC313D6-II** | **GPC313S6-II**

Powered by CUMMINS



### ■ Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	313	344
Power (KW)	250	275
Rated speed	1800RPM	
Standard voltage	220/127V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPC313D6   GPC313S6	
Engine brand	CUMMINS	
Engine model	NTA855-G1	
Speed control type	Electronic	
Alternator brand	GENLITEC	
Alternator model	S314G220	
Control system	SMARTGEN HGM6120N	
Starter motor voltage	24V	
Frequency	60Hz	
Fuel Consumption (L/H)	100% Prime Load	73.4
	75% Prime Load	56.1
	50% Prime Load	38.4
	25% Prime Load	20.6



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010
- **GPC313D6-I: OPEN TYPE; GPC313S6-I: SILENT TYPE**

#### (1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall **not exceed** 80% of the prime power. 10% overload available for governing purposes only.

#### (2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	PRP		ESP		Current Amps
	KVA	KW	KVA	KW	
480/277	313	250	344	275	1129
208/120	313	250	344	275	869
220/127	313	250	344	275	821

#### Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

#### Dimension & Weight

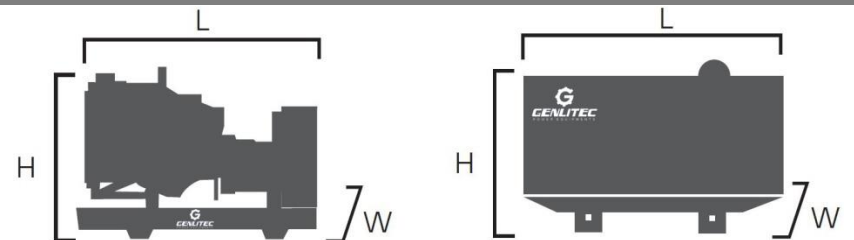

Dimension	Open type	Silent type
Length (L)	3100mm	3980mm
Width (W)	1100mm	1400mm
Height (H)	1850mm	2150mm
Net Weight	3350kg	4000kg

**Note: This parameters allows for some acceptable deviations.**

## ■ Engine Specification



### MODEL: CUMMINS NTA855-G1

Cylinder number	6
Aspiration system	Turbo, aftercooled
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	140 x 152
Compression ratio	14.5:1
Rated speed (RPM)	1800
Displacement (L)	14
Rated power (KW)	287
Standby power (KW)	317
Oil consumption (g/kw.h)	≤4
Fuel system	Direct Injection
Oil capacity (L)	38.6
Coolant capacity (L)	20.8 (Engine Only)
Starter motor capacity	DC 24V

## ■ Alternator Specification



### MODEL: GENLITC S314G220

Number of phase	3
Rated power (KW)	250
Frequency (Hz)	60
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	6/12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

### Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

## ■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
<ul style="list-style-type: none"> <li>○ Water jacket pre-heater</li> <li>○ Lubrication oil pre-heater</li> <li>○ Battery isolator</li> </ul>	<ul style="list-style-type: none"> <li>○ Anti-condensation heater</li> <li>○ PMG</li> <li>○ <b>STAMFORD</b> alternator</li> <li>○ <b>LEROY SOMER</b> alternator</li> </ul>	<ul style="list-style-type: none"> <li>○ Extended fuel tank 12h/24h/72h</li> <li>○ <b>C-Type</b> Soundproof canopy</li> <li>○ <b>D-Type</b> Soundproof canopy</li> <li>○ Trailer mounted</li> </ul>	<ul style="list-style-type: none"> <li>○ Remote control system</li> <li>○ Build-in/External ATS</li> <li>○ Synchronizing System</li> <li>○ Power output sockets</li> </ul>

## Control Panel

### Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

### Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
  - Over / under voltage
  - Over / under frequency
  - Current / voltage asymmetry
  - Over current / overload
- Three phase AMF function
  - Over / under voltage
  - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



### Control Module Model: SMARTGEN HGM6120

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

## Controller Module Options

COMAP	DEIF	DEESEA
AMF25	SGC 420	DSE7320
		

Local Distributor / Partner

