GPW375S5 | GPW375D5







Generator Specification

Service	PRP (1)	ESP(2)	
Power (KVA)	375	413	
Power (KW)	300	330	
Rated speed	1500	RPM	
Standard voltage	400/2	230V	
Power factor	0.8		
Phase	3		



Performance D	ata	
Λ	Aodel	GPW375S5 GPW375D5
Engir	ne brand	WEICHAI
Engir	ne model	SWP12D353E200
Speed	control type	Electronic
Altern	ator brand	GENLITEC
Alterno	ator model ς^{igodol}	\$314G300
Cont	rol system	SMARTGEN HGM6120N
Starter m	notor voltage	24V
Fre	quency	50Hz
, &	100% Prime L	oad 81
Fuel	75% Prime Lo	bad 60.8
Consumption	50% Prime Lo	bad 40.5
(L/H)	25% Prime Lo	pad /
	Fuel Tank (L) 650

ISO (E

GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 006/42/EC Machinery directive
- 2014/30/EU Electromagnetic compatibility directive
- EN 12100:2010; EN ISO 8528-13:2016; EN 60204-1:2018; EN 61000-
- 6-2:2019; EN 61000-6-4:2019
- GPW375S5 (Silent Type)
- GPW375D5 (Open Type)

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.


(2) ESP (Standby Power)

According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set can deliver for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage	ESI	P	PRP		Current
(V)	KVA	KW	KVA	KW	Amps
415/240	413	330	375	300	521.7
400/230	413	330	375	300	541.3
380/220	413	330	375	300	569.8

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

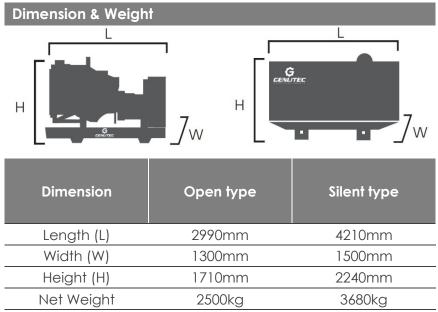


Note: This parameter allows for some acceptable deviations.

GPW375S5 | GPW375D5





Engine Specification

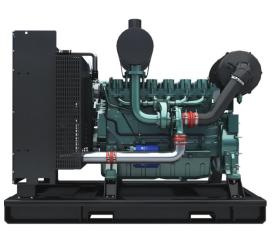

Alternator Specification



MODEL: WEICHAI WP12D353E200	0	MODEL: GENLITEC \$314G300	
Cylinder number	6	Number of phase	3
Aspiration system	Turbo, aftercooled	Rated power (KW/KVA)	300/375
Cooling method	Water cooled	Frequency (Hz)	50
Governor type	Electronic	Power factor (Cos Phi)	c 0.8
Bore x Stroke (mm)	126 x 155	Poles	4
Compression ratio	17:1	Temp. rise	125K
Rated speed (RPM)	1500	Terminals cO	6/12
Displacement (L)	11.59	Insulation type	H class
Rated power (KW)	321	Ambient temp.	40°C
Standby power (KW)	353	IP rating	IP23
Injection	≤4	Excitation system	Self-excited
Coolant capacity (L)	25 (Engine only)	Bearing C	Single bearing
Oil capacity (L)	24	Coating	Vacuum impregnation
Max. water temperature	Mechanical pump	Voltage regulator	A.V.R
Starter motor capacity	DC 24V	Coupling	Flexible disc

Stc	andard Supply S <mark>cop</mark> e
•	Industrial exhaust silencer
•	Maintenance free battery

- Water cooling radiator
- A.V.R
- Battery wires

Flexible pipes

•

- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

Optional Supply Scope

	Engine		Alternator		Generator Sets		Control Panel
0	Water jacket pre-heater	0	Anti-condensation heater	0	Extended fuel tank 12h/24h/72h	0	Remote control system
0	Lubrication oil pre-heater	0	PMG	0	Trailer mounted	0	Build-in/External ATS
0	Battery isolator	0	STAMFORD alternator			0	Synchronizing System
		0	LEROY SOMER alternator			0	Power output sockets

Warranty Period

WEICHAI diesel engine: 12 months or 1000 working hours.
STAMFORD/LEROY SOMER alternator: Global warranty, 12 months or 1000 working hours.
GENLITEC alternator: Factory warranty, 12 months or 1000 working hours.
DEEPSEA control module: Factory warranty, 12 months or 1000 working hours.

GPW375S5 | GPW375D5





Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
- Over / under voltage
- Over / under frequency
- Current / voltage asymmetry
- Over current / overload
- Three phase AMF function
- Over / under voltage
- Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket

	SmartGen	Genset Controller
Alarm Alarm Status	8U 8.8H 9U 8.8H 9.8A 8.8KW 82 1.24.2U ② 0RF 机模式	Z
	— 🔻	Auto Start
		2

Control Module Model: SMARTGEN HGM6120N					
LCD (132 x 64)					
Silicon rubber					
5 5					
6					
3					
Yes					
/ 2P3W / 3P3W / 3P4W					
15-360V (ph-N)					
50/60Hz					
Yes					
USB					
USB					
DC 8-35V					
-25 ~ +70℃					

Controller Module Options

СОМАР	DEIF	DEEPSEA
AMF25	SGC 420	DSE7320
IntoliLite AMF 25 IntoliLite AM	SSC 420	

Genlitec[®]

GENLITEC POWER TECHNOLOGY CO., LTD. GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD. marketing@genlitec.com | www.genlitecpower.com

All information in the document is substantially correct at the time of printing But may be subsequently altered by the company.

