

Model: GPP400D5 | GPP400S5

Powered by PERKINS



Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	400	440
Power (KW)	320	352
Rated speed	1500RPM	
Standard voltage	415/240V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPP400D5 GPP400S5	
Engine brand	PERKINS	
Engine model	2206C-E13TAG3	
Speed control type	Electronic	
Alternator brand	STAMFORD GENLITEC	
Alternator model	HCI444F S314G320	
Control system	SMARTGEN HGM6110N	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption (L/H)	100% Prime Load	85
	75% Prime Load	63.7
	50% Prime Load	42.5
	Fuel tank capacity	480L



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010

• GPP400D5: OPEN TYPE; GPP400S5: SILENT TYPE

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	440	352	400	320	556
400/230	440	352	400	320	577
380/220	440	352	400	320	608

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2


Dimension & Weight

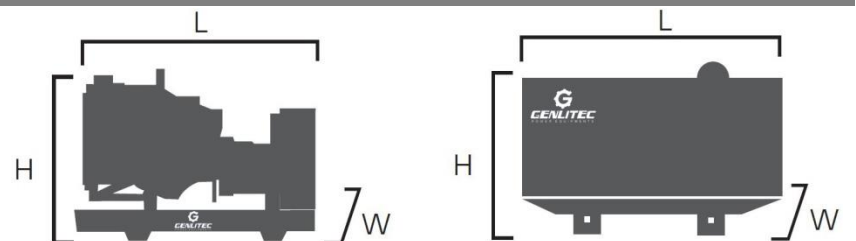

Dimension	Open type	Silent type
Length (L)	3280mm	4280mm
Width (W)	1130mm	1400mm
Height (H)	1950mm	2150mm
Net Weight	3300kg	4500kg

Note: This parameters allows for some acceptable deviations.

■ **Engine Specification**

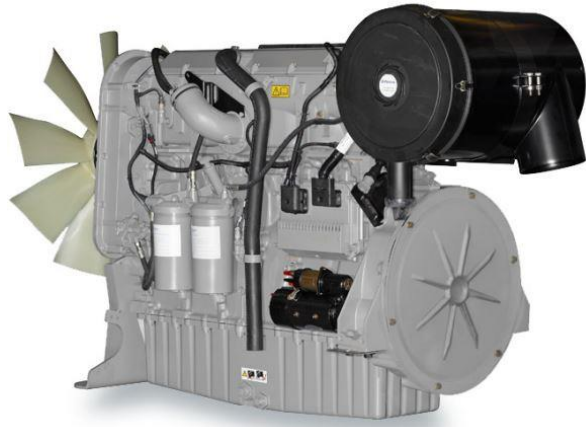

MODEL: PERKINS 2206C-E13TAG3	
Cylinder number	6
Aspiration system	Turbo, Air/Air Cooling
Cooling method	Water cooled
Governor type	Electronic
Combustion system	Direct injection
Bore x Stroke (mm)	130x157
Compression ratio	16.3:1
Rated speed (RPM)	1500
Displacement (L)	12.5
Rated power (KWm)(with fan)	371
Standby power (KWm)	408
Oil consumption (g/kw.h)	≤4
Coolant capacity (L)	58
Fuel system	PERKINS MEUI
Starter motor capacity	DC 24V – 70A

■ **Alternator Specification**



MODEL: STAMFORD HCI444F GENLITEC S314G310	
Number of phase	3
Rated power (KW/KVA)	320/400
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ **Optional Supply Scope**

Engine	Alternator	Generator Sets	Control Panel
○ Water jacket pre-heater	○ Anti-condensation heater	○ Extended fuel tank 12h/24h/72h	○ Remote control system
○ Lubrication oil pre-heater	○ PMG	○ Soundproof canopy	○ Build-in/External ATS
○ Battery isolator	○ LEROY SOMER alternator	○ Trailer mounted	○ Synchronizing System
	○ GENLITEC alternator	○ 20GP containerized canopy	○ Power output sockets

Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
 - Over / under voltage
 - Over / under frequency
 - Current / voltage asymmetry
 - Over current / overload
- Three phase AMF function
 - Over / under voltage
 - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



Control Module Model: SMARTGEN HGM6110N

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options

COMAP

AMF25



DEESEA

DSE6020



DEESEA

DSE7320

