

# Model: GPP600D5 | GPP600S5

Powered by PERKINS 2806C-E18TAG1A



## Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	600	660
Power (KW)	480	528
Rated speed	1500RPM	
Standard voltage	380/220V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPP600D5   GPP600S5	
Engine brand	PERKINS	
Engine model	2806C-E18TAG1A	
Speed control type	Electronic Spray	
Alternator brand	STAMFORD   GENLITEC	
Alternator model	HCI544E   S354G480	
Control system	SMARTGEN HGM6120N	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption (L/H)	100% Prime Load	129
	75% Prime Load	96
	50% Prime Load	63
	25% Prime Load	32



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010

### • GPP600D5: OPEN TYPE; GPP600S5: SILENT TYPE

#### (1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

#### (2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	660	528	600	480	835
400/230	660	528	600	480	866
380/220	660	528	600	480	912

#### Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

#### Dimension & Weight

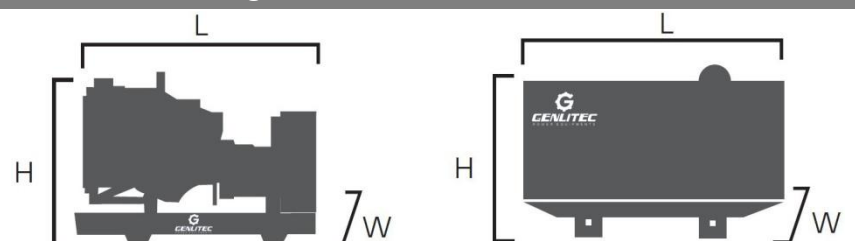

Dimension	Open type	Silent type
Length (L)	3400mm	4680mm
Width (W)	1450mm	1850mm
Height (H)	2100mm	2550mm
Net Weight	3980kg	5300kg

Note: This parameters allows for some acceptable deviations.

■ **Engine Specification**



MODEL: PERKINS 2806C-E18TAG1A	
Cylinder number	6
Aspiration system	Turbo, air to air charge
Cooling method	Water cooled
Governor type	Electronic
Combustion system	Direct injection
Bore x Stroke (mm)	145x183
Compression ratio	18:1
Rated speed (RPM)	1500
Displacement (L)	15.2
Rated power (KWm)	565
Standby power (KWm)	583.8
Lubrication capacity (L)	62
Coolant capacity (L)	61
Fuel system	PERKINS MEUI
Starter motor capacity	DC 24V – 70A

■ **Alternator Specification**



MODEL: STAMFORD HCI544E   GENLITEC S354G480	
Number of phase	3
Rated power (KW/KVA)	480/600
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

**Standard Supply Scope**

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ **Optional Supply Scope**

Engine	Alternator	Generator Sets	Control Panel
○ Water jacket pre-heater	○ Anti-condensation heater	○ Extended fuel tank 12h/24h/72h	○ Remote control system
○ Lubrication oil pre-heater	○ PMG	○ Soundproof canopy	○ Build-in/External ATS
○ Battery isolator	○ LEROY SOMER alternator	○ Trailer mounted	○ Synchronizing System
	○ GENLITEC alternator	○ 20GP containerized canopy	○ Power output sockets

Control Panel Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer



Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
  - Over / under voltage
  - Over / under frequency
  - Current / voltage asymmetry
  - Over current / overload
- Three phase AMF function
  - Over / under voltage
  - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket

Control Module Model: SMARTGEN HGM6120N

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options

COMAP	DEEPSEA	DEEPSEA
AMF25	DSE6020	DSE7320
		