

■ Model: GPC250D5-II | GPC250S5-II

Powered by CUMMINS



■ Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	250	275
Power (KW)	200	220
Rated speed	1500RPM	
Standard voltage	400/230V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPC250D5 GPC250S5	
Engine brand	CUMMINS	
Engine model	NT855-GA	
Speed control type	Electronic	
Alternator brand	GENLITEC	
Alternator model	S274G200	
Control system	SMARTGEN HGM6120N	
Starter motor voltage	24V	
Frequency	50Hz	
Fuel Consumption (L/H)	100% Prime Load	54
	75% Prime Load	41
	50% Prime Load	30
	25% Prime Load	20
Fuel Tank (L)	400	



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010

● GPC250D5-II: OPEN TYPE; GPC250S5-II: SILENT TYPE

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
415/240	275	220	250	200	347.8
400/230	275	220	250	200	360.8
380/220	275	220	250	200	379.8

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

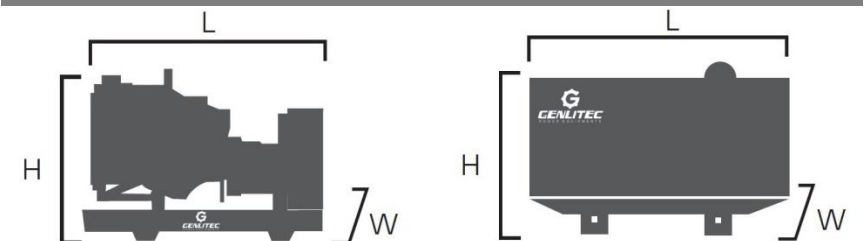

Dimension	Open type	Silent type
Length (L)	2600mm	3700mm
Width (W)	1200mm	1400mm
Height (H)	1700mm	2250mm
Net Weight	1900kg	2900kg

Note: This parameters allows for some acceptable deviations.

■ Engine Specification



MODEL: CUMMINS NT855-GA

Cylinder number	6
Aspiration system	Turbocharged
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	140x152
Compression ratio	16:1
Rated speed (RPM)	1500
Displacement (L)	14
Rated power (KW)	231
Standby power (KW)	254
Injection	Direct injection
Coolant capacity (L)	60.6 (with Radiator)
Oil capacity (L)	38.6
Max. water temperature	104°C
Starter motor capacity	DC 24V

■ Alternator Specification



MODEL: GENLITEC S274G200

Number of phase	3
Rated power (KW/KVA)	200/250
Frequency (Hz)	50
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
<ul style="list-style-type: none"> ○ Water jacket pre-heater ○ Lubrication oil pre-heater ○ Battery isolator 	<ul style="list-style-type: none"> ○ Anti-condensation heater ○ PMG ○ STAMFORD alternator ○ LEROY SOMER alternator 	<ul style="list-style-type: none"> ○ Extended fuel tank 12h/24h/72h ○ C-Type Soundproof canopy ○ D-Type Soundproof canopy ○ Trailer mounted 	<ul style="list-style-type: none"> ○ Remote control system ○ Build-in/External ATS ○ Synchronizing System ○ Power output sockets

■ Warranty Period

CUMMINS diesel engine: Global warranty, 12 months or 1000 working hours.

STAMFORD alternator: Global warranty, 12 months or 1000 working hours.

GENLITEC alternator: Factory warranty, 12 months or 1000 working hours.

SMARTGEN control module: Factory warranty, 12 months or 1000 working hours.

Control Panel

Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
 - Over / under voltage
 - Over / under frequency
 - Current / voltage asymmetry
 - Over current / overload
- Three phase AMF function
 - Over / under voltage
 - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



Control Module Model: SMARTGEN HGM6120

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

Controller Module Options

COMAP	DEIF	DEESEA
AMF25	SGC 420	DSE7320
		

Local Distributor / Partner

