

## ■ Model: **GPC275S6** | **GPC275D6**

Powered by CUMMINS 6LTAA8.9-G3



### ■ Generator Specification

Service	PRP(1)	ESP(2)
Power (KVA)	275	300
Power (KW)	220	240
Rated speed	1800RPM	
Standard voltage	127/220V	
Power factor	0.8	
Phase	3	

Performance Data		
Model	GPC275S6   GPC275D6	
Engine brand	<b>CUMMINS</b>	
Engine model	6LTAA8.9-G3	
Speed control type	Electronic	
Alternator brand	<b>GENLITEC</b>	
Alternator model	S274G200	
Control system	<b>SMARTGEN HGM6120N</b>	
Starter motor voltage	24V	
Frequency	60Hz	
Fuel Consumption (L/H)	100% Prime Load	62
	75% Prime Load	46
	50% Prime Load	31
	25% Prime Load	18
Fuel Tank (L)	450	



GENLITEC Power gensets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery safety.
- 2006/95/EC Low voltage
- EN 60204-1: 2006+A1: 2009, EN ISO 12100: 2010, EN ISO 13849-1:2008, EN 12601: 2010
- **GPC275D6: OPEN TYPE; GPC275S6: SILENT TYPE**

#### (1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

#### (2) ESP (Standby Power)


According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Voltage (V)	ESP		PRP		Current Amps
	KVA	KW	KVA	KW	
110/190	300	240	275	220	835
120/208	300	240	275	220	764
127/220	300	240	275	220	724

#### Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2


#### Dimension & Weight

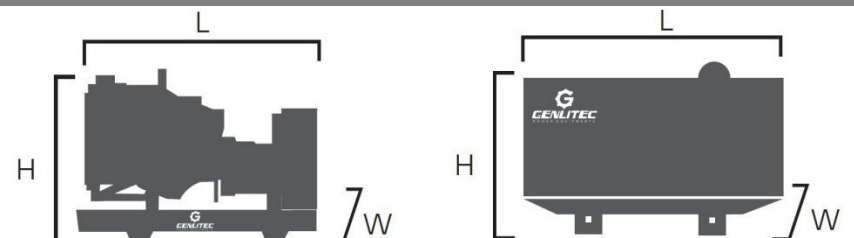

Dimension	Open type	Silent type
Length (L)	3100mm	4000mm
Width (W)	1200mm	1450mm
Height (H)	1850mm	2250mm
Net Weight	3350kg	4000kg

Note: This parameters allows for some acceptable deviations.

## ■ Engine Specification

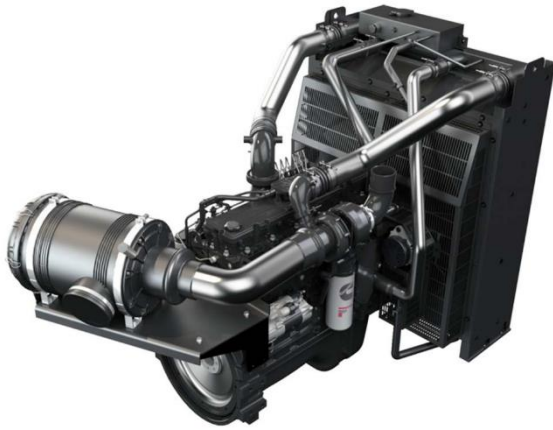

### MODEL: CUMMINS 6LTA8.9-G3

Cylinder number	6
Aspiration system	Turbo, charged air cooled
Cooling method	Water cooled
Governor type	Electronic
Bore x Stroke (mm)	114x145
Compression ratio	16.6:1
Rated speed (RPM)	1800
Displacement (L)	8.9
Rated power (KW)	255
Standby power (KW)	282
Fuel system	BYC P7100
Coolant capacity (L)	11.1 (engine only)
Oil capacity (L)	27.6
Max. water temperature	104°C
Starter motor capacity	DC 24V

## ■ Alternator Specification



### MODEL: GENLITEC S274G200

Number of phase	3
Rated power (KW/KVA)	220/275
Frequency (Hz)	60
Power factor (Cos Phi)	0.8
Poles	4
Temp. rise	125K
Terminals	6/12
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

### Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Float Battery charger
- Manual books
- Tool kits
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker

## ■ Optional Supply Scope

Engine	Alternator	Generator Sets	Control Panel
○ Water jacket pre-heater	○ Anti-condensation heater	○ Extended fuel tank 12h/24h/72h	○ Remote control system
○ Lubrication oil pre-heater	○ PMG	○ <b>C-Type</b> Soundproof canopy	○ Build-in/External ATS
○ Battery isolator	○ <b>STAMFORD</b> alternator	○ <b>D-Type</b> Soundproof canopy	○ Synchronizing System
	○ <b>LEROY SOMER</b> alternator	○ Trailer mounted	○ Power output sockets

## Control Panel

### Configuration

- Emergency stop button
- Protection MCB (Main circuit breaker)
- Float battery charger
- ATS connection
- AMF digital control module
- Fuel level meter
- Controller power switch
- Alarm buzzer

### Features

- Chinese, English, Spanish, Turkish, Russian & French language
- Three phase generator monitoring
- Automatic or manual start/stop of the gensets
- Push buttons for simple control & operation
- Generator measurements (50Hz/60Hz)
- Precision collect & display parameters about ENGINE
- Comprehensive shutdown or warning on fault condition
- Three phase generator protections
  - Over / under voltage
  - Over / under frequency
  - Current / voltage asymmetry
  - Over current / overload
- Three phase AMF function
  - Over / under voltage
  - Loss of phase detection function
- Emergency start function
- IP55 waterproof with rubber-ring gasket



### Control Module Model: SMARTGEN HGM6120

Display	LCD (132 x 64)
Operation panel	Silicon rubber
Digital input	5
Relay output	6
Analogue input	3
AMF	Yes
AC System	1P2W / 2P3W / 3P3W / 3P4W
Alternator voltage	15-360V (ph-N)
Alternator frequency	50/60Hz
KW/Amp Detecting & Display	Yes
Monitor interface	USB
Programmable interface	USB
DC supply	DC 8-35V
Operating temp.	-25 ~ +70°C

## Controller Module Options

COMAP	DEIF	DEESEA
AMF25	SGC 420	DSE7320
		

Local Distributor / Partner

