

GLT1600L-9MR

Powered by **KOHLER** EU STAGE **Tier4**

Genlitech[®]
Power & Lighting Solutions



■ Generator Specification

Service	50Hz	60Hz
Genset PRP ⁽¹⁾ (KW)	6.0	7.0
Engine speed	1500RPM	1800RPM
Power factor	1.0	
Phase	Single	
Voltage (V)	110/220; 120/240; 220; 230; 240	

Performance Data

Model	GLT1600L-9MR
Engine brand	KOHLER
Engine model	KDW1003
Speed control type	Mechanical
Alternator brand	GENLITEC
Alternator model	S164G8
Control system	SMARTGEN HGM1790N
Starter motor voltage	12V
Max. height of mast	9 meters
Mast lifting/lowing system	Mechanical
Total power of lamps	4x400 watts LED
Fuel consumption (100% load)	2.5L/H
Fuel tank capacity	100L



GENLITEC Power lighting towers & generator sets are compliant with ISO 9001 and CE standard, which include the following directives:

- 2006/42/EC Machinery directive
- 2014/30/EU Electromagnetic compatibility directive
- EN 12100:2010; EN ISO 8528-13:2016; EN 60204-1:2018; EN 61000-6-2:2019; EN 61000-6-4:2019

(1) PRP (Prime Power)

According to ISO 8528-1, prime power is the maximum power available during a variable power sequence, which may be run for an unlimited number of hours per year, between stated maintenance intervals. The permissible average power output during at 24 hours period shall not exceed 80% of the prime power. 10% overload available for governing purposes only.

(2) ESP (Standby Power)

According to ISO 8528-1. It is defined as the maximum power available, under the agreed operating conditions, for which the generating set is capable of delivering for up to 500 hours of operation per year (of which no more than 300 hours for continuative use) with the maintenance intervals and procedures being carried out as prescribed by the manufactures. No overload capability is available.

Container Loading Capacity

8 SETS (disassembled**) / 20GP

16 SETS (disassembled**) / 40GP




**dismounted parts: tow bar, wheels, axle, stabilizers, mast pole

Standard Reference Conditions

Note: Standard reference condition 25°C (77°F) air inlet temp. 100m (328ft) A.S.L 30% relative humidity. Fuel consumption date with diesel fuel with specific gravity of 0.85 and conforming to BS 2869: 1998 Class A2

Dimension & Weight

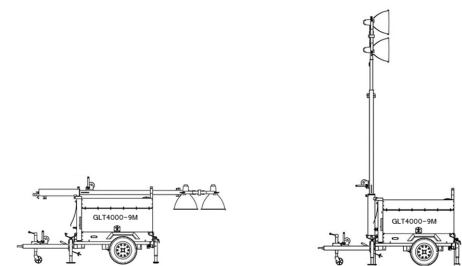

Dimension	Storage	Working
Length (L)	4250mm	2600mm
Width (W)	1450mm	2350mm
Height (H)	1700mm	9000mm
Net Weight	830kg	

Note: This parameter allows for some acceptable deviations.

GLT1600L-9MR

Powered by **KOHLER** EU STAGE V Tier4^F

Genlitech[®]
Power & Lighting Solutions

■ Engine Specification



MODEL: KOHLER KDW1003	
Cylinder number	3
Aspiration system	Natural
Cooling method	Water cooled
Combustion system	Indirect injection
Bore x Stroke (mm)	75 x 77.6
Compression ratio	21.8:1
Rated speed (RPM)	1500/1800
Displacement (L)	1.028
Rated power (KW)	8.0/1500RPM 9.5/1800RPM
Coolant capacity (L)	4.5
Oil capacity (L)	4.7
Speed governor	Mechanical
Starter motor capacity	DC 12V
Certified Emission	EU Stage V / EPA Tier 4F

■ Operation Mast Specification

Max. height of mast	9m
Elevation system	Mechanical
Raising/Lowering mast method	Manual winch
Mast stages	3
Turning angle	358° manually
Mast material	Galvanization Steel tube
Self-lock Winch	2 x 1800lbs

■ Chassis Specification

Tow Hitch type	"O" ring or Ball tow hitch
Brake type	Mechanical hand brake
Trailer structure	Single axle
Tyre size	13 inches
Leveling jack type	5 x Manual

■ Alternator Specification



MODEL: GENLITEC S164G8	
Number of phases	Single
Rated power (KW)	8
Frequency (Hz)	50/60
Power factor (Cos Phi)	1
Temp. rise	125K
Insulation type	H class
Ambient temp.	40°C
IP rating	IP23
Excitation system	Self-excited
Bearing	Single bearing
Coating	Vacuum impregnation
Voltage regulator	A.V.R
Coupling	Flexible disc

■ Lamps Specification

Total power of lamps	4 x 400 watts
Lamps type	LED
Light capacity	4 x 60,000 lumen
Design lifetime	50000 hours
Working temperature	-40°C ~ 50°C
Max. Light coverage	5500m ² (Horizontal Angle)
Protection grade	IP65

■ Controller Panel Specification

Control module	SMARTGEN HGM1790N
Main & Lamps Breaker	DELIXI
Emergency stop	Equipped
Starting method	Electric (Key start/Button))
Output Socket	2 x Single phase

GLT1600L-9MR

Powered by **KOHLER** EU STAGE **Tier4^F**


Genlitech[®]
Power & Lighting Solutions

LED Lights Detailed Technical Data

Image




Dimension

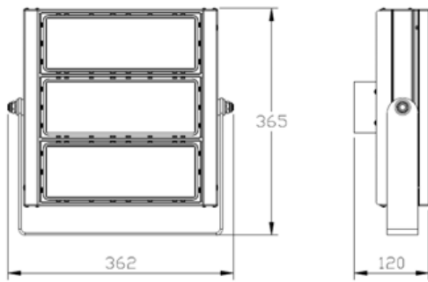

Description	LED Floodlights
Model number	JR328-400W
Light power	400W LED
Installation method	"U" type holder
Working temperature	-40°C ~ 50°C
Rated voltage	AC 100-277V
Rated frequency	50/60Hz
Power factor	≥0.95
Design lifetime	50000 hours
Protection grade	IP65
Certificates	3C, UL, CE
Light cover material	Aluminum
Radiate unit	Aluminum radiator
Lighting angle	25° , 40° , 60° , 90° , 110°
Luminous efficacy	150Lm/W
Luminous flux	60000Lm@5000K
Color temperature	5700±300K
Color rendering index	RA≥70@5000K

Lighting Performance

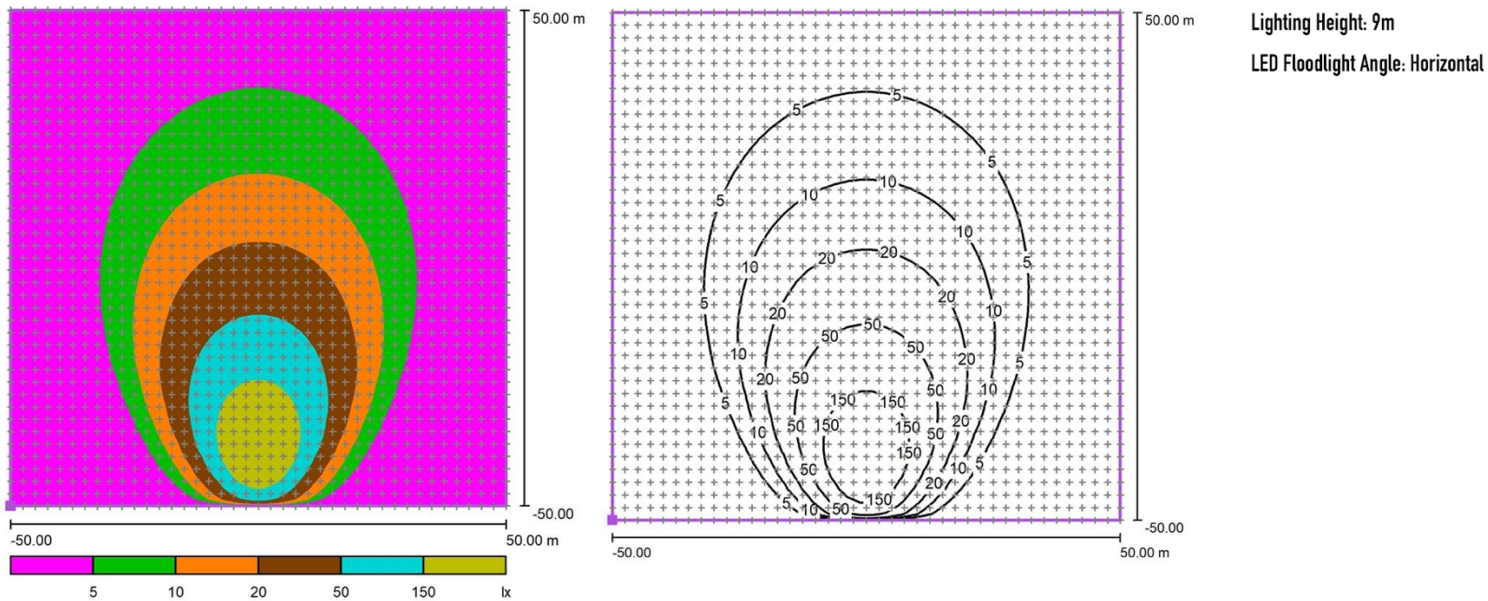

Standard Supply Scope

- Industrial exhaust silencer
- Maintenance free battery
- Water cooling radiator
- A.V.R
- Weatherproof canopy
- Flexible pipes
- Battery wires
- Wiring diagram
- Build-in based fuel tank
- Top caution light
- Float Battery charger
- Manual books
- Ball/Ring hitch with safe chain
- Emergency stop button
- Base frame
- Digital control panel
- Main circuit breaker
- Power output socket x 2

Optional Supply Scope

Engine	AC Alternator	Control Panel	Lamps	Others
<input type="checkbox"/> Kubota D1105-BG	<input type="checkbox"/> Stamford	<input type="checkbox"/> Smartgen ALC404	<input type="checkbox"/> 4x1000W MH lamps	<input type="checkbox"/> Security camera
<input type="checkbox"/> Perkins 403D-11G	<input type="checkbox"/> Mecc Alte	<input type="checkbox"/> Smartgen ALC704	<input type="checkbox"/> 4x350W LED	<input type="checkbox"/> Grounding rod
<input type="checkbox"/> Yanmar 3TNV88		<input type="checkbox"/> Smartgen ALC708	<input type="checkbox"/> 4x480W LED	<input type="checkbox"/> Water-jacket heater
<input type="checkbox"/> Yanmar 3TNV76		<input type="checkbox"/> ComAp LTC 80		<input type="checkbox"/> Battery isolator
<input type="checkbox"/> Quanchai QC380D		<input type="checkbox"/> Wi-Fi router (4G SIM)		<input type="checkbox"/> Fire Extinguisher
		<input type="checkbox"/> Remote control & monitoring system		<input type="checkbox"/> Wheel chocks
				<input type="checkbox"/> Reflector set

GLT1600L-9MR

Powered by **KOHLER** EU STAGE **Tier4^F**

Genlitec[®]
Power & Lighting Solutions

Control Panel

Configuration

- Emergency stop button
- Protection MCB + Lamps & Socket circuit breaker
- Digital control module
- Power output socket x 2 (Single Phase)
- Controller box
- Alarm buzzer



Key Features

- Large back-lit icon LCD display
- Single / Three phase generator monitoring
- AC phase voltage display
- Generator frequency display
- Engine speed RPM display
- Battery voltage Vdc display
- Generator running hours display
- Engine coolant temperature display
- Engine oil pressure display
- Pre-alarm & shutdown alarm function
- Low oil pressure shutdown alarm
- Engine high temperature shutdown alarm
- Engine over speed shutdown alarm
- Generator over/under voltage shutdown alarm
- Generator overload shutdown alarm
- Start/Stop failure shutdown alarm
- IP65 rating offers increased resistance to water ingress

Control Module: SMARTGEN HGM1790N

Digital input	5
Relay output	5
Communication interface	PC
AMF	N/A
AC System	1P2W / 2P3W / 3P3W / 3P4W
Phase voltage input	0-300Vac
Frequency range	3Hz – 70Hz
Standby current	TBA
Accuracy	1%
Control relay outputs	3A/30Vdc
DC supply	DC 8-35V
Operating temp.	-20 ~ +70°C

Controller Module Options

Smartgen	Smartgen	ComAp
ALC404	ALC704/708	IntelliLite LTC 80

Genlitec[®]
Power & Lighting Solutions

GENLITEC POWER TECHNOLOGY CO., LTD.
GENLITEC (FUZHOU) POWER EQUIPMET CO., LTD.
marketing@genlitec.com | www.genlitecpower.com

All information in the document is substantially correct at the time of printing.
But may be subsequently altered by the company.

Local Distributor / Partner

